



LWPX12 COMMERCIAL DUTY • 5YR
LED SPEC-SELECT™ WALL PACK
OUTDOOR NON-CUTOFF AND SEMI-CUTOFF
WALL-MOUNTED AREA LUMINARIES

FEATURES

- Adjustable wattage and color temperature.
- Replaces traditional HID wall packs.
- Durable, die casting housing.
- Powder coat finish, corrosion and weather resistant.
- Sealed to keep out moisture and environmental contaminants.


APPLICATION

Ideal for security, walkways and perimeter lighting.

ELECTRICAL

Wattage	80W / 100W / 120W
Voltage	120-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	10000-15000
Lumens Per Watt (Lm/W)	125
Color Temperature (CCT)	3000K / 4000K / 5000K
Color Rendering (CRI)	80
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	110° x 105°
Light Distribution	--
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	--
Driver	ARC-DI-60I1450 (2 ea.)

CONSTRUCTION

Housing	Die Cast Aluminum
Lens	Tempered Glass
Base / Power Supply	Hard Wired
Finish	Bronze

QUALIFICATIONS

Model Number	SSWP-C-FSC1-1-MV-BRZ
--------------	----------------------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


LWPX12 COMMERCIAL DUTY • 5YR LED SPEC-SELECT™ WALL PACK



ITEM INFORMATION

DIMENSIONS (Inches)

Length	18.4"
Width	9.4"
Height	9.1"
Weight (Lbs)	--

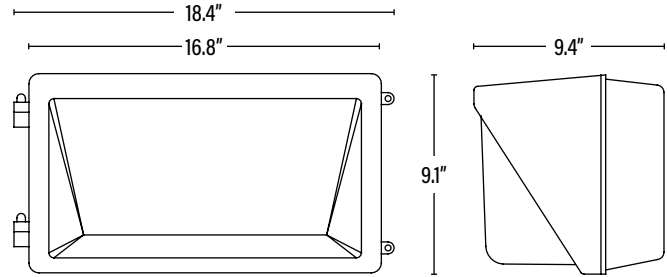

PACKAGING

PACKAGING	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)	
Master Carton	1	811768024739	18.8" x 11" x 11.4"	14.3
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
LWPX12	LED SPEC-SELECT™ WALL PACK/80-100-120W/30-50K/120-277V/BRZ	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # SSWP-C-FSC1-1-MV-BRZ

ADDITIONAL INFORMATION:

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.