



L17114 LT. COMMERCIAL • 5YR LED CEILING LIGHT INDOOR FIXTURE

FEATURES

- Diffusing lens provides glare free illumination and even light distribution.
- Designed with the lasted solid state lighting and electronic driver for optimal performance and energy efficiency.
- Die formed cold rolled steel mounting plate; painted with a treatment for anti-corrosion.

APPLICATION

Homes, schools, retail, office and hospitality.

ELECTRICAL

Wattage	17W
Voltage	120V
Current	0.15A
Power Factor	0.8
Total Harmonic Distortion (THD)	N/A

LIGHTING PERFORMANCE

Lumens	1300
Lumens Per Watt (Lm/W)	76
Color Temperature (CCT)	4000K
Color Rendering (CRI)	80
R9 (Red Value)	25
R13 (Skin Tones)	87
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B1 - U3 - G1
Dimmable Lighting Control	<i>Dimmable</i> 120V Dimming

ENVIRONMENT

Operating Temperature	-4° ~ 104°F
Suitable Location	DAMP
Ingress Protection Rating	IP20

LIFESPAN

Average Life (Hours)	35,000
Warranty (Years)	5


COMPONENTS

LED Light Source	Samsung SPMWHx228F
Driver	837546 - 16W320MAC

CONSTRUCTION

Housing	C.R.S / PC
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Manufacturer Model #	83757 
----------------------	---------------------------------------------------------------------------------------------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


L17114 LT. COMMERCIAL • 5YR
LED CEILING LIGHT



DIMENSIONS (Inches)

Length	10.6"
Width	10.6"
Height	3.3"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

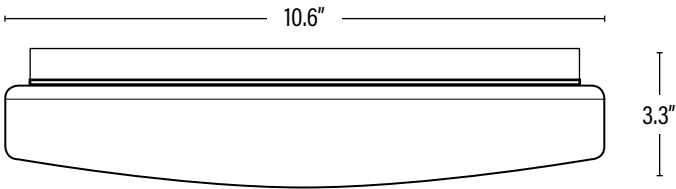

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768029021	--	--
Individual Box	1	811768029024	--	--
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
L17114	LED 17W 11" WHITE SQUARE CEILING LIGHT/40K/120V/DIMMABLE	10

Manufactured by P.Q.L., Inc. - Manufacturer Model # 83757 ENERGY STAR®

PERFORMANCE DATA

PACKAGING