



LF0013 LT. COMMERCIAL • 5YR BULLET FLOOD

ARCHITECTURAL FLOOD AND SPOT
LUMINAIRES

FEATURES

- Durable, die casting aluminum housing with tempered glass.
- Bronze powder coat finish, corrosion and weather resistant.
- Sealed to keep out moisture and environmental contaminants.


APPLICATION

Landscape lighting and wall washing.

ELECTRICAL

Wattage	12W
Voltage	100-277V
Current	0.093A
Power Factor	0.9
Total Harmonic Distortion (THD)	14.4

LIGHTING PERFORMANCE

Lumens	1202
Lumens Per Watt (Lm/W)	100
Color Temperature (CCT)	3000K
Color Rendering (CRI)	73
R9 (Red Value)	0
R13 (Skin Tones)	72
Beam Angle	60°
Light Distribution	Type VS
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-31° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Nichia
Driver	Yiguang LP12W-36

CONSTRUCTION

Housing	Aluminum / Prismatic Lens
Base / Power Supply	Hard Wired
Finish	Bronze

QUALIFICATIONS

Manufacturer Model #	83740
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


LF0013 LT. COMMERCIAL • 5YR
BULLET FLOOD



DIMENSIONS (Inches)

Length	6.7"
Width/Diameter	4.1"
Height	6.9"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

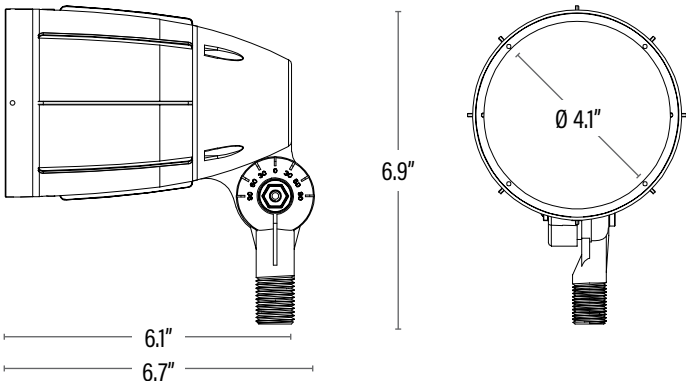

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	18	10811768029410	19.2" x 20.9" x 18.1"	11.1
Individual Box	1	811768029413	--	2.8
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
LF0013	LED 12W BULLET/FL/3000K/100-277V	18

Manufactured by P.Q.L., Inc. - Manufacturer Model # 83740

PERFORMANCE DATA

PACKAGING