



LMM145 LT. COMMERCIAL • 5YR MINI SNAP & GO[™] MODULE

LINEAR RETROFIT KITS FOR 4' LUMINAIRES

FEATURES

- Replacements for traditional fluorescent fixtures and recessed troffers in drop-in ceilings.
- Linkable*; up to 10 modules can be connected in a series.
- * Maximum linked wattage of 150W combined. Maximum total power per input cord should not exceed 250W.

MOUNTING

• Designed for surface or magnetic* mounting. *Magnetic brackets sold separately.

APPLICATION

Ideal for retrofitting existing fluorescent fixtures and recessed troffers.

EACH MODULE INCLUDES





Power Cord Connector

2 ea. Mounting Brackets

Linking Butt Connector

ELECTRICAL

ELECTRICAL		
Wattage	14W	
Voltage	120V	
Current	0.18A	
Power Factor	0.9	
Total Harmonic Distortion (THD)	20	
LIGHTING PERFORMANCE		
Lumens	1853	
Lumens Per Watt (Lm/W)	131	
Color Temperature (CCT)	5000K	
Color Rendering (CRI)	80	
R9 (Red Value)		
R13 (Skin Tones)		
Beam Angle	120°	
Light Distribution		
Dimmable Lighting Control	ALL COMPANY	
ENVIRONMENT		
Operating Temperature	-4° ~ 104°F	
Suitable Location	DAMP	
Ingress Protection Rating	IP44	
LIFESPAN		
Average Life (Hours)	50,000	
Warranty (Years)	5	
COMPONENTS		
LED Light Source		
CONSTRUCTION		
Housing	Aluminum / PC	
Lens	Frosted	
Base / Power Supply	Hard Wired	
QUALIFICATIONS		

Manufasturar Madal

Manufacturer Model #

87021




Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

LMM145 LT. COMMERCIAL • 5YR MINI SNAP & GO[™] MODULE



DIMENSIONS (Inches)

Length	45.6"	
Width	1.1"	
Height	1″	
Weight (Lbs)		

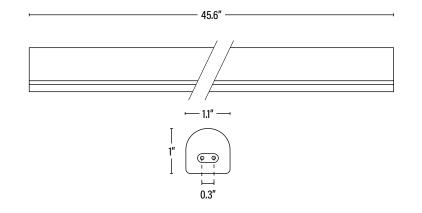

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	36	10811768029014	49.2" x 8.3" x 7.9"	12.3
Individual Box	1	811768029017	N/A	0.6
Country of Origin	China			
HS Tariff				

ORDERING

DESCRIPTION	CASE
LED MINI SNAP & GO [™] MODULE 4'/15W/50K/FR	36
LED MINI SNAP & G0 [™] MODULE 4'/15W/50K/FR	

Manufactured by P.Q.L., Inc. - Manufacturer Model # 87021