

XTREME DUTY

# CBX014

#### **FEATURES**

Spec-Select™ Backlit LED Panels offer the flexibility of 9 fixtures in 1, delivering energy-efficient, adjustable lighting for a perfect fit in any environment.

- Selectable wattage: Three adjustable output settings for onsite flexibility.
- Selectable CCT: Choose from three color temperatures.
- Sensor Ready: Integrated Sensor Option (ISO); compatible plug-in motion and daylight sensor sold separately.

### **APPLICATION**

Ideal for a broad range of environments including offices, schools, hospitals, airports, lobbies, retail spaces, and other commercial or industrial settings.

#### PRODUCT INFORMATION

ELECTRICAL		
Wattages (Selectable)	20W / 25W / 30W	
Voltage	120-277V	
Current	30W @ 120V = 0.25A	
Power Factor	0.9	
THD	15.5	

OPTICAL		
Lumens	2500 / 3125 / 3750	
Efficiency (LPW)	125	
CCT (Selectable)	3500K / 4100K / 5000K	
CRI	83	
Beam Angle	120°	
Dimming	From optional sensor, or customer 0-10V controls	

ENVIRONMENT	
Operating Temperature	-4°F ~ 113°F
Suitable Location	Damp

CONSTRUCTION	
LED Chip	Bridgelux
Driver	SIF30-I0800
Sensor Socket	12VDC Aux.
Housing	Aluminum
Lens	Frosted
Base / Power Supply	Hard Wired
Finish	White

LIFESPAN (Complete terms can be found on our website.)	
Life Hours (Avg.)	50,000
Warranty (Years)	7


LISTINGS	
Model Number	55750







#### **DIMENSIONS**

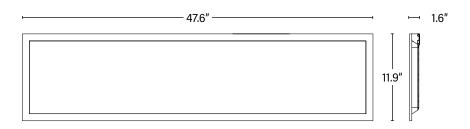

## **ORDERING**

CODE	DESCRIPTION	CASE
CBX014	LED 1X4 SPEC-SELECT™ PANEL/BLP/20-25-30W/35-50K/DIMM/ISO/120-277V	2
ACCESSORIES		
LF3600	5FT SUSPENDED CABLE MOUNTING KIT FOR LED PANEL	100

## **PACKAGING**

MASTER CASE	
Quantity	2 Pack
Size (LxWxH)	49.2" x 13.1" x 3"
Gross Weight (Lbs)	26.5
UPC	10899645001544
UPC Item	899645001547

Tariff: 9405.11.6020

## **NOTES**

- Default settings; 20W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver, selection should be made prior to installation. See installs for full details.