



XTREME DUTY

CDX224A

FEATURES

Spec-Select™ LED Designer Strip offer the flexibility of 9 fixtures in 1, delivering energy-efficient, adjustable lighting for a perfect fit in any environment.

- Selectable wattage: Three adjustable output settings for on-site flexibility.
- Selectable CCT: Choose from three color temperatures.
- Sensor Ready: Integrated Sensor Option (ISO); compatible plug-in motion and daylight sensor and elbow sold separately.
- Surface or chain mounting; single or continuous row.

APPLICATION

Perfect for offices, warehouses, parking garages, schools, corridors, and other commercial or industrial applications.

PRODUCT INFORMATION

ELECTRICAL	
Wattages (Selectable)	15W / 20W / 25W
Voltage	120-277V
Current	25W @ 120V = 0.20A
Power Factor	0.9
THD	14.1

OPTICAL	
Lumens	1980 / 2640 / 3300
Efficiency (LPW)	132
CCT (Selectable)	3500K / 4100K / 5000K
CRI	83
Beam Angle	130°
Dimming	From optional sensor, or customer 0-10V controls

ENVIRONMENT	
Operating Temperature	-4°F ~ 122°F
Suitable Location	Damp

CONSTRUCTION	
LED Chip	Bridgelux
Driver	SIF30-I0550-SS
Sensor Socket	12VDC Aux.
Housing	Aluminum
Lens	Frosted
Base / Power Supply	Hard Wired
Finish	White

LIFESPAN <i>(Complete terms can be found on our website.)</i>	
Life Hours (Avg.)	50,000
Warranty (Years)	7

LISTINGS	
Model Number	55761




XTREME DUTY

CDX224A

MEBULBS
PREMIUM QUALITY LIGHTING®

DIMENSIONS

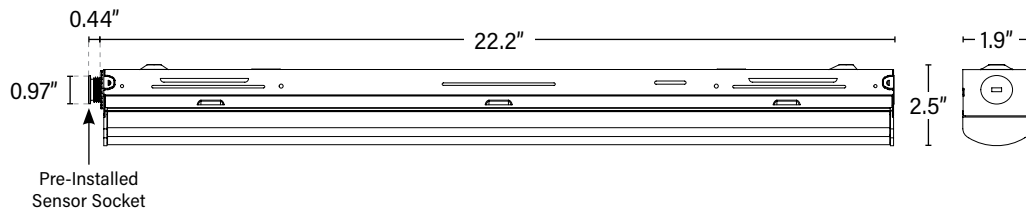

ORDERING

CODE	DESCRIPTION	CASE
CDX224A	LED 2FT SPEC-SELECT™ NARROW DESIGNER STRIP/15-20-25W/35-50K/DIMM/ISO/120-277V	9

ACCESSORIES

LVSEN1	BI-LEVEL PIR MOTION & DAYLIGHT SCREW-IN SENSOR FOR ISO STRIPS & VAPOR TIGHTS/40FT (REQUIRES 12-24VDC AUX & ELBOW #LVELBO)	100
LVSEN2	BI-LEVEL MICROWAVE MOTION & DAYLIGHT SCREW-IN SENSOR FOR ISO STRIPS & VAPOR TIGHTS/40FT (REQUIRES 12-24VDC AUX & ELBOW #LVELBO)	100
LVELBO	EXTERNAL SWIVEL QUICK CONNECT ADJUSTABLE ELBOW FOR LVSEN1/LVSEN2 (For best sensor performance.)	100

PACKAGING

MASTER CASE	
Quantity	9
Size (LxWxH)	24" x 7.1" x 8.6"
Gross Weight (Lbs)	24.7
UPC	10811768026396
INDIVIDUAL BOX	
Dimensions (LxWxH)	22.7" x 2.2" x 2.7"
Gross Weight (Lbs)	4.1
UPC Item	811768026399

Tariff: 9405.11.6020

NOTES

- Default settings; 15W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver, selection should be made prior to installation. See installs for full details.

Manufactured by PQL, Inc. • Model Number: 55761

MEBULBS • WWW.MEBULBS.COM

© MEBULBS • 4837 AMBER VALLEY PKWY S STE 500 • FARGO ND 58104-9074 • 1-800-MEBULBS

Published lumen values are approximate and may vary slightly. Specifications may change without prior notice. Photos are for general reference only.
REV. 07-21-25