



CF0544 XTREME DUTY • 7YR LED CANOPY PARKING GARAGE LUMINAIRES

FEATURES

- Ultra-thin design
- Replaces 100-175W MH

HOUSING

- Sealed die-casting profile for indoor applications
- Polycarbonate optical lens with heat resisting

MOUNTING

- Three 1/2" threaded conduit and one 3/4" conduit entry points


APPLICATION

Parking structures and storage areas

ELECTRICAL

Wattage	45W
Voltage	100-277V
Current	0.369A
Power Factor	0.9
Total Harmonic Distortion (THD)	13.8

LIGHTING PERFORMANCE

Lumens	4005
Lumens Per Watt (Lm/W)	92
Color Temperature (CCT)	4000K
Color Rendering (CRI)	84
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	160°
Light Distribution	Type VS
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	7

COMPONENTS

LED Light Source	Cree CXA3050
Driver	52111 (50W Max.)

CONSTRUCTION

Housing	Aluminum/PC
Base / Power Supply	Hard Wired
Finish	Black

QUALIFICATIONS

Manufacturer Model #	83230
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


CF0544 XTREME DUTY • 7YR
LED CANOPY



DIMENSIONS (Inches)

Length	9.6"
Width/Diameter	9.6"
Height	3.1"
Weight (Lbs)	4.7

Line drawings may not be to scale and are for general reference only.

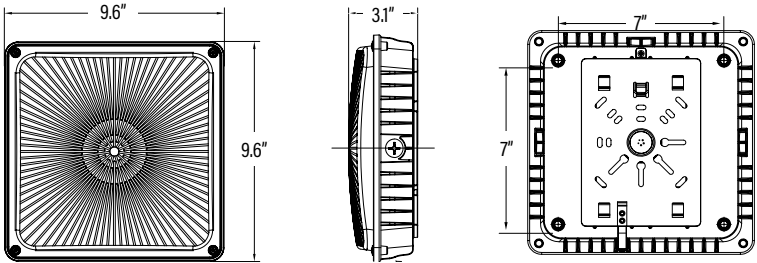

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768025910	11.8" x 11.8" x 5.5"	6.2
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
CF0544	LED CANOPY 45W/40K/100-277V/BLACK	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # 83230

PERFORMANCE DATA

PACKAGING