



CF3965 XTREME DUTY • 7YR LED 48" VAPOR TIGHT DIRECT LINEAR AMBIENT LUMINARIES

FEATURES

- Low-profile which meets limitless range of applications.
- Use 30% less energy than a linear fluorescent fixtures.
- 100% UV stabilized polycarbonate housing and diffusers eliminates glare and produces even light distribution.
- Liquid silicone perimeter gasket
- Knockouts on each end and 6 on the back
- Series 301 Stainless steel clips (10 ea.)

MOUNTING

Designed for surface, pendant, and suspended mounting.

APPLICATION

Ideal for parking garages, cold storage, food processing facilities, dusty and wet environments.

ELECTRICAL

Wattage	65W
Voltage	120-277V
Current	0.534A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

LIGHTING PERFORMANCE

Lumens	7540
Lumens Per Watt (Lm/W)	116
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	21
R13 (Skin Tones)	86
Beam Angle	120°
Light Distribution	Type II, Very Short
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	7

COMPONENTS

LED Light Source	Seoul 3528
Driver	Simon SI80-11400

CONSTRUCTION

Housing	Polycarbonate
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Manufacturer Model #	55253
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


CF3965 XTREME DUTY • 7YR
LED 48" VAPOR TIGHT



DIMENSIONS (Inches)

Length	49.8"
Width	5.1"
Height	3.9"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

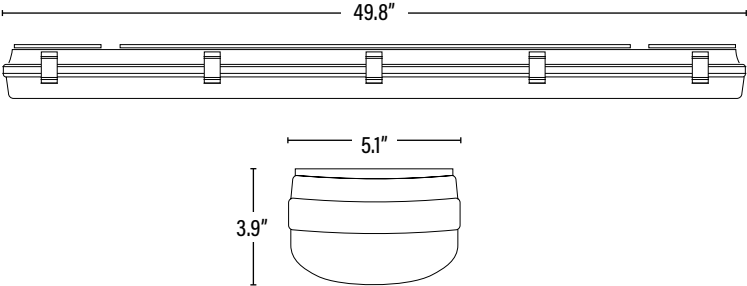

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10811768027553	51.9" x 11.2" x 8"	48.5
Individual Box	1	811768027556	51.4" x 7.3" x 4.3"	12.1
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
CF3965	LED VAPOR TIGHT 48" 65W/50K/FROSTED LENS/120-277V DIMMABLE	4

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55253

PERFORMANCE DATA

PACKAGING