



Built-in  
Photocell



XTREME DUTY

## CMWX25

### FEATURES

- Selectable wattage: Three adjustable output settings for on-site flexibility.
- Selectable CCT: Choose from three color temperatures.
- Integrated Photocell with On/Off switch
- Sealed housing for outdoor applications

### APPLICATION

These fixtures offer a great alternative to traditional HID, making them ideal for commercial and industrial settings such as pathways, perimeter lighting, building entrances, and walkways, while also enhancing security.

### PRODUCT INFORMATION

ELECTRICAL	
Wattages (Selectable)	15W / 20W / 25W
Voltage	120-277V
Current	25W @ 120V = 0.21A
Power Factor	0.9
THD	15

OPTICAL	
Lumens	1920 / 2560 / 3200
Efficiency (LPW)	128
CCT (Selectable)	3000K / 4000K / 5000K
CRI	82
Light Distribution	Type IV, Very Short
B.U.G. Rating	B1 - U3 - G2
Dimming	0-10V, 10% to 100%

ENVIRONMENT	
Operating Temperature	-40°F ~ 122°F
Suitable Location	Wet
IP Rating	IP66

CONSTRUCTION	
LED Chip	Everlight
Housing	Aluminum
Lens	PC / Clear
Base / Power Supply	Hard Wired
Finish	Bronze

LIFESPAN <i>(Complete terms can be found on our website.)</i>	
Life Hours (Avg.)	50,000
Warranty (Years)	7

LISTINGS	
Model Number	MWP-SS25S-W-8-PH
Primary Use Designation	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires




XTREME DUTY

# CMWX25



## DIMENSIONS

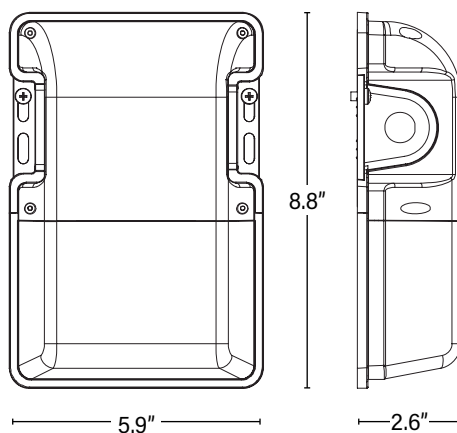

## ORDERING

CODE	DESCRIPTION	CASE
CMWX25	LED SPEC-SELECT™ MINI WALL PACK/15-20-25W/30-40-50K/DIMM/120-277V/BRZ/PC	10

## PACKAGING

MASTER CASE	
Quantity	10
Size (LxWxH)	15.4" x 13.2" x 9.7"
Gross Weight (Lbs)	15.7
UPC	10811768027515
INDIVIDUAL BOX	
Dimensions (LxWxH)	9.1" x 6.3" x 3"
Gross Weight (Lbs)	1.6
UPC Item	811768027518

Tariff: 9405.11.6020

## NOTES

- Default settings; 15W, 5000K.
- The color temperature, wattage, and photocell can be adjusted using dip switches located on the side of the fixture. See installs for full details.

Manufactured by PQL, Inc. • Model Number: MWP-SS25S-W-8-PH