



**SELECTABLE WATTAGE & CCT**

**CWX448 XTREME DUTY • 7YR  
LED 4' SPEC-SELECT™ WRAP A-ROUND  
DIRECT LINEAR AMBIENT LUMINARIES**

**FEATURES**

Spec-Select™ Wrap A-Rounds feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Energy efficient
- No flickering
- Knockouts on each end

**MOUNTING**

Designed for surface or suspended chain mounting.

**APPLICATION**

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

**ELECTRICAL**

Wattage	30W / 35W / 40W
Voltage	120-277V
Current	0.33-0.14A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

**LIGHTING PERFORMANCE**

Lumens	3990-5320
Lumens Per Watt (Lm/W)	133
Color Temperature (CCT)	3500K / 4100K / 5000K
Color Rendering (CRI)	82
R9 (Red Value)	7
R13 (Skin Tones)	82
Beam Angle	100°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U3 - G1
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

**ENVIRONMENT**

Operating Temperature	-4 ~ 113°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP40

**LIFESPAN**

Average Life (Hours)	50,000
Warranty (Years)	<b>7</b>

**COMPONENTS**

LED Light Source	Seoul 3528
Driver	SIP50-I850

**CONSTRUCTION**

Housing	Aluminum
Lens	Frosted
Base / Power Supply	Hard Wired
Finish	White

**QUALIFICATIONS**

Manufacturer Model #	55617
----------------------	-------



*Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.*


# CWX448 XTREME DUTY • 7YR LED 4' SPEC-SELECT™ WRAP A-ROUND



ITEM INFORMATION

## DIMENSIONS (Inches)

Length	47.7"
Width	9.4"
Height	3.6"
Net Weight (Lbs)	--

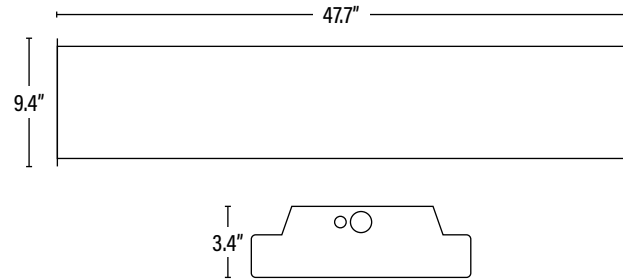

## PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10811768022879	49" x 13.8" x 10.3"	36.4
Individual Box	1	811768022872	--	9.1
Country of Origin	China			
HS Tariff	9405.10.6020			

## ORDERING

ITEM#	DESCRIPTION	CASE
CWX448	LED 4' SPEC-SELECT™ WRAP A-ROUND - 30/35/40W/35-50K/120-277V/DIMMABLE	4

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55617

## ACCESSORIES

LF3599	360° LOW/HIGH BAY FIXTURE OCCUPANCY PIR SENSOR 30' DIA, 8-40'HEIGHT 800W/1200W • 120/277V	50
LF3502	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN/SPLIT TYPE/L T20C (For use with drivers that are 100W or less.)	10

## ADDITIONAL INFORMATION:

- Default settings; 40W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. The color temperature and wattage should be selected prior to installation.

