



LBU133 STANDARD • 5YR
LED LINEAR BALLAST BYPASS T8/U6
DUAL MODE INTERNAL DRIVER
(UL TYPE A AND TYPE B)

FEATURES

The LED T8 Ballast Bypass SE/DE U6 lamp provides exceptional lighting with reduced energy and maintenance costs. The special tube can work with or without a ballast, making it a top-of-the-line replacement for standard fluorescent lamps.

DIRECT WIRE OR DIRECT INSTALL


Simple rewiring installation allows lamps to run off main (or use it with an instant start ballast as a plug and go).

- Thermal fuse - for added safety
- Exceptional efficacy
- U6 will work with shunted and non-shunted sockets
(See note under additional information)

***Not suitable for dimming or emergency ballasts.*

ELECTRICAL	LAMP	SYSTEM POWER
Wattage	13W	16W
Voltage	120-277V	
Power Factor	0.9	
Total Harmonic Distortion (THD)	20	

LIGHTING PERFORMANCE

Lumens	1950	
Lumens Per Watt (Lm/W)	122	
Color Temperature (CCT)	3500K	
Color Rendering (CRI)	83	
R9 (Red Value)	1	
R13 (Skin Tones)	--	
Beam Angle	160°	
Light Distribution	Type VS	
BUG Rating (Backlight, Uplight, and Glare)	2 Lamp	B1 - U2 - G1
Dimmable Lighting Control		

ENVIRONMENT

Operating Temperature	-4° ~ 113°F	
Suitable Location	DAMP	
Ingress Protection Rating	IP20	
Suitable Fixture Type	Enclosed	

LIFESPAN

Average Life (Hours)	50,000	
Warranty (Years)	5	

COMPONENTS

LED Light Source	Samsung SPMWH1228	
------------------	-------------------	--

CONSTRUCTION

Housing	PC / Plastic End Caps	
Lens	Frosted	
Base / Power Supply	G13 - Medium Bi Pin	

QUALIFICATIONS

Manufacturer Model #	90439	
----------------------	-------	--



Visit www.designlights.org/search to confirm qualification. • DLC® lists the wattage of the system power. • Published lumens on LED products are approximate and may vary slightly.


LBU133 STANDARD • 5YR LED LINEAR BALLAST BYPASS T8/U6



DIMENSIONS (Inches)

Length	22.3"
Width/Diameter	1"
Weight (Lbs)	0.9

Line drawings may not be to scale and are for general reference only.

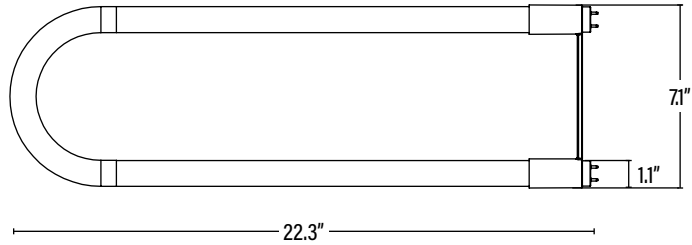

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	12	10899645001568	--	--
Individual Box	1	899645001561	23" x 7.2" x 1.1"	--
Country of Origin	China			
HS Tariff	8539.50.0010			

ORDERING

ITEM#	DESCRIPTION	CASE
LBU133	LED 13WT8/U6/35K/FR - SE/DE	12

Manufactured by P.Q.L., Inc. - Manufacturer Model # 90439

ADDITIONAL INFORMATION:

• In direct wire application; shunted sockets use double ended wiring only and non-shunted can use either single or double ended wiring. Please refer to install instructions for further details.

PERFORMANCE DATA

PACKAGING