



## LF0845 LT. COMMERCIAL • 5YR LED WALL PACK

OUTDOOR NON-CUTOFF AND SEMI-CUTOFF  
WALL-MOUNTED AREA LUMINAIRES


### FEATURES

- Replaces 100-250W traditional HID wall packs.
- Durable, die casting housing.
- Powder coat finish, corrosion and weather resistant.
- Sealed to keep out moisture and environmental contaminants.

### APPLICATION

Ideal for security, walkways and perimeter lighting.

### LIGHT DISTRIBUTION CURVE



### ELECTRICAL

Wattage	40W
Voltage	120-277V
Current	--
Power Factor	0.9
Total Harmonic Distortion (THD)	--

### LIGHTING PERFORMANCE

Lumens	4641
Lumens Per Watt (Lm/W)	108
Color Temperature (CCT)	5000K
Color Rendering (CRI)	70
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	110° x 105°
Light Distribution	Type I, Very Short
BUG Rating (Backlight, Uplight, and Glare)	B2 - U3 - G2
Dimmable Lighting Control	

### ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP65

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

### COMPONENTS

LED Light Source	LUXEON 3030 2D
Driver	WP-HHG-040U

### CONSTRUCTION

Housing	Die Cast Aluminum
Lens	Tempered Glass
Base / Power Supply	Hard Wired
Finish	Bronze

### QUALIFICATIONS

Manufacturer Model #	84170
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


# LF0845 LT. COMMERCIAL • 5YR LED WALL PACK



## DIMENSIONS (Inches)

Length	14.2"
Width	7.7"
Height	9.1"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

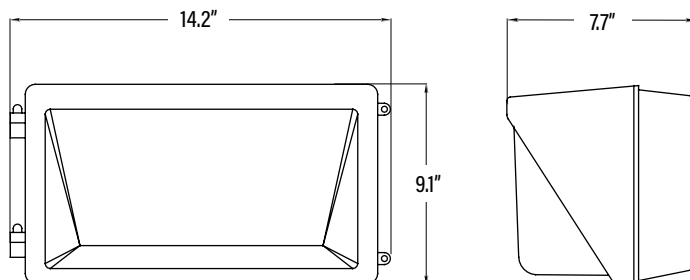

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	854432004330	15.4" x 10.6" x 9.4"	8.8
Country of Origin	China			
HS Tariff	9405.10.6020			

## ORDERING

ITEM#	DESCRIPTION	CASE
LF0845	LED WALL PACK 40W/50K/120-277V/BRONZE/V2	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # 84170

## ADDITIONAL INFORMATION:

**Note:** To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.

PERFORMANCE DATA

PACKAGING