



LF0865 LT. COMMERCIAL • 5YR LED WALL PACK

OUTDOOR NON-CUTOFF AND SEMI-CUTOFF
WALL-MOUNTED AREA LUMINARIES


FEATURES

- Replaces 100-250W traditional HID wall packs.
- Durable, die casting housing.
- Powder coat finish, corrosion and weather resistant.
- Sealed to keep out moisture and environmental contaminants.

APPLICATION

Ideal for security, walkways and perimeter lighting.

LIGHT DISTRIBUTION CURVE

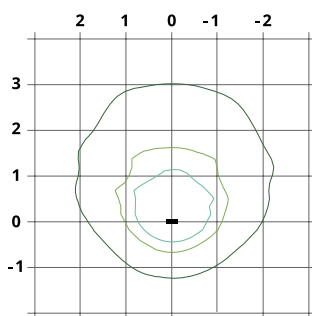

ELECTRICAL

Wattage	60W
Voltage	120-277V
Current	--
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	6513
Lumens Per Watt (Lm/W)	106
Color Temperature (CCT)	5000K
Color Rendering (CRI)	70
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	110° x 105°
Light Distribution	Type I, Very Short
BUG Rating (Backlight, Uplight, and Glare)	B2 - U4 - G3
Dimmable Lighting Control	<i>Dimmable</i> 1-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	LUXEON 3030 2D
Driver	WP-HLA-060U

CONSTRUCTION

Housing	Die Cast Aluminum
Lens	Tempered Glass
Base / Power Supply	Hard Wired
Finish	Bronze

QUALIFICATIONS

Manufacturer Model #	84172
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


LF0865 LT. COMMERCIAL • 5YR
LED WALL PACK



DIMENSIONS (Inches)

Length	14.2"
Width	7.7"
Height	9.1"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

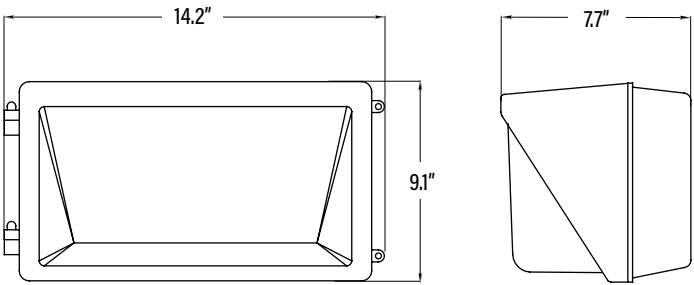

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	854432004668	15.4" x 10.6" x 9.4"	9.7
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
LF0865	LED WALL PACK 60W/50K/120-277V/DIMMABLE/BRONZE/V2	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # 84172

ADDITIONAL INFORMATION:

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.

PERFORMANCE DATA

PACKAGING