



## **LF3564** LT. COMMERCIAL • 5YR **LED 2x4 PANEL** 2X4 LUMINARIES FOR AMBIENT LIGHTING OF

2X4 LUMINARIES FOR AMBIENT LIGHTING OF INTERIOR COMMERCIAL SPACES

### FEATURES

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Instant-On
- For covered ceilings only
- · Earthquake proof hooks included

#### **APPLICATION**

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

ELECTRICAL			
Wattage	65W		
Voltage	120-277V		
Current	0.54-0.23A		
Power Factor	0.9		
Total Harmonic Distortion (THD)	15		
LIGHTING PERFORMANCE			
Lumens	6630		
Lumens Per Watt (Lm/W)	102		
Color Temperature (CCT)	4000K		
Color Rendering (CRI)	80		
R9 (Red Value)	11		
R13 (Skin Tones)	84		
Beam Angle	120°		
Light Distribution	Туре VS		
Dimmable Lighting Control	<b>(Dimmable</b> 0-10V, Range 10% - 100%		
ENVIRONMENT			
Operating Temperature	-4° ~ 122°F		
Suitable Location	DAMP		
Ingress Protection Rating	IP40		
LIFESPAN			
Average Life (Hours)	50,000		
Warranty (Years)	5		
COMPONENTS			
LED Light Source	Samsung 1228		
Driver	XZ-PK60B-420145		
CONSTRUCTION			
Housing	Aluminum		
Lens	РММА		
Base / Power Supply	Hard Wired		
Finish	White		
QUALIFICATIONS			
Manufacturer Model #	55348		
CERTIFIED			

Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


# LF3564 LT. COMMERCIAL • 5YR LED 2x4 PANEL



#### **DIMENSIONS** (Inches)

. ,		
Length	47.8"	
Width/Diameter	23.7"	
Height	1.7"	
Weight (Lbs)	13.5	
the device many at the teneral and any few second seferation and		

Line drawings may not be to scale and are for general reference only.

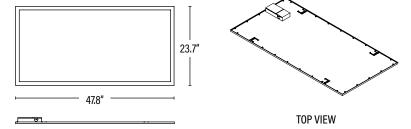

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	2	10811768025733		
Individual Box	1	811768025736		
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING		
ITEM#	DESCRIPTION	CASE
LF3564	LED 2X4 PANEL - 65W/40K/120-277V/DIMMABLE/V5	2

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55348