



LF3565 LT. COMMERCIAL • 5YR LED 2x4 PANEL

2X4 LUMINARIES FOR AMBIENT LIGHTING OF
INTERIOR COMMERCIAL SPACES

FEATURES

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Instant-On
- For covered ceilings only
- Earthquake proof hooks included

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

ELECTRICAL

Wattage	65W
Voltage	120-277V
Current	0.54-0.23A
Power Factor	0.9
Total Harmonic Distortion (THD)	15

LIGHTING PERFORMANCE

Lumens	6760
Lumens Per Watt (Lm/W)	104
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	11
R13 (Skin Tones)	84
Beam Angle	120°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Samsung 1228
Driver	XZ-PK60B-420145

CONSTRUCTION

Housing	Aluminum
Lens	PMMA
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Manufacturer Model #	55349
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.



LF3565 LT. COMMERCIAL • 5YR
LED 2x4 PANEL



DIMENSIONS (Inches)

Length	47.8"
Width/Diameter	23.7"
Height	1.7"
Weight (Lbs)	13.5

Line drawings may not be to scale and are for general reference only.

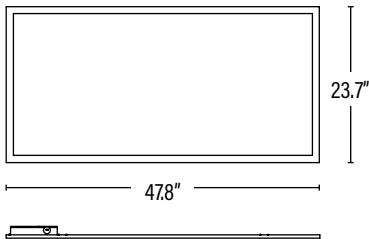

TOP VIEW

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	2	10811768025740	--	--
Individual Box	1	811768025743	--	--
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
LF3565	LED 2X4 PANEL - 65W/50K/120-277V/DIMMABLE/V5	2

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55349

PERFORMANCE DATA

PACKAGING