



LF3575 LT. COMMERCIAL • 5YR LED 2X4 PANEL

2X4 LUMINARIES FOR AMBIENT LIGHTING OF
INTERIOR COMMERCIAL SPACES

FEATURES

- High Efficiency, Energy Saving
- Up to 36% Savings vs. T8 Fluorescent
- Low glare, bright consistent lighting
- For covered ceilings only
- Earthquake proof hooks included

APPLICATION

Ideal for offices, conference rooms, hospitals, lobbies, hotels, classrooms, workshops, cafeterias and other common areas.

ELECTRICAL

Wattage	75W
Voltage	100-277V
Current	1700mA
Power Factor	0.9
Total Harmonic Distortion (THD)	9.8

LIGHTING PERFORMANCE

Lumens	8300
Lumens Per Watt (Lm/W)	111
Color Temperature (CCT)	5000K
Color Rendering (CRI)	83
R9 (Red Value)	10
R13 (Skin Tones)	85
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B3 - U1 - G1
Dimmable Lighting Control	<i>Dimmable</i> 1-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4 ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Seoul
Driver	554366

CONSTRUCTION

Housing	Aluminum
Lens	--
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Manufacturer Model #	55436
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


LF3575 LT. COMMERCIAL • 5YR
LED 2X4 PANEL



DIMENSIONS (Inches)

Length	47.8"
Width/Diameter	23.7"
Height	1.7"
Weight (Lbs)	13.7

Line drawings may not be to scale and are for general reference only.

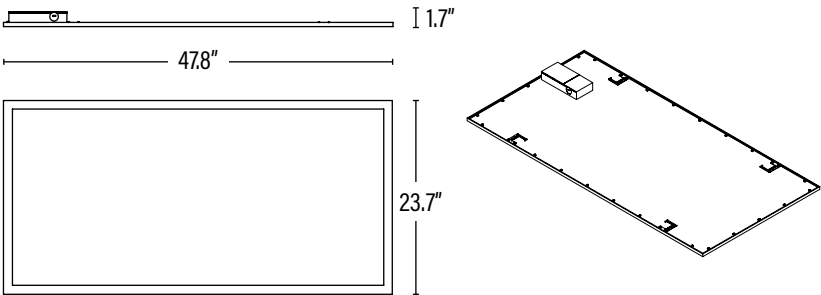

TOP VIEW

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	2	--	49.5" x 25.6" x 4.5"	32.9
Individual Box	1	--	--	16.5
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
LF3575	LED 2X4 PANEL - 75W/50K/120-277V/DIMM/V6	2

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55436

PERFORMANCE DATA

PACKAGING