



LFP924 LT. COMMERCIAL • 5YR LED MINI WALL PACK

OUTDOOR WALL-MOUNTED AREA LUMINAIRES

FEATURES

- Easy installation
- Replaces 50W HID
- With photo cell
- Sealed die-casting profile for outdoor applications.
- Polycarbonate optical lens with UV stabilizers.

APPLICATION

Ideal for security, pathway and perimeter lighting, building entry ways and walkways.

ELECTRICAL

Wattage	25W
Voltage	120-277V
Current	--
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	2600
Lumens Per Watt (Lm/W)	104
Color Temperature (CCT)	4000K
Color Rendering (CRI)	70
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	180°
Light Distribution	Type III, Very Short
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-13° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	LUXEON 3030 2D
Driver	52108

CONSTRUCTION

Housing	Aluminum Alloy / PC
Lens	Clear
Base / Power Supply	Hard Wired
Finish	Black

QUALIFICATIONS

Manufacturer Model #	L-MWP-25-40K-B-PC2
----------------------	--------------------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


LFP924 LT. COMMERCIAL • 5YR
LED MINI WALL PACK



DIMENSIONS (Inches)

Length	5.5"
Width/Diameter	3.2"
Height	8.4"
Weight (Lbs)	2.67

Line drawings may not be to scale and are for general reference only.

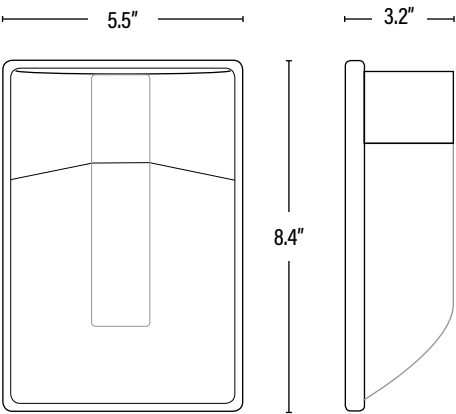

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	12	10811768026501	--	--
Individual Box	1	811768026504	--	--
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
LFP924	LED MINI WALL PACK/BLACK/25W/CL/40K/PHOTO CELL/120-277V	12

Manufactured by P.Q.L., Inc. - Manufacturer Model # L-MWP-25-40K-B-PC2

PERFORMANCE DATA

PACKAGING