



LHB708 COMMERCIAL DUTY • 5YR
BI-LEVEL DIMMING SENSOR
LED LINEAR HIGHBAY ISO ACCESSORY


FEATURES

- Slim, low-profile design.
- Low voltage external power supply.

APPLICATION

Sensor is designed for use with select MEBULBS LED Linear High Bays with ISO.

COVERAGE AREA

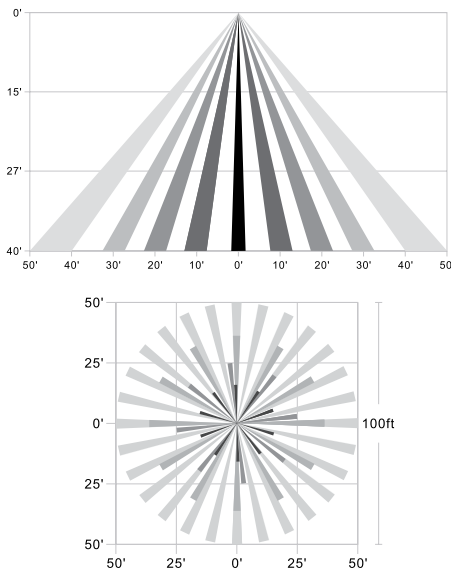

ELECTRICAL

Input Voltage	12V DC
Power consumption	0.1W

PERFORMANCE

Detection Diameter	100FT Max.
Max Mounting Height	40FT Max.
Dimmable Lighting Control	0-10V

ENVIRONMENT

Operating Temperature	-30° ~ 131°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Warranty (Years)	5
------------------	----------

CONSTRUCTION

Housing	PC
Finish	White

QUALIFICATIONS



Specifications are subject to change without notice.

LHB708 COMMERCIAL DUTY • 5YR BI-LEVEL DIMMING SENSOR




ITEM INFORMATION

DIMENSIONS (Inches)

Length (MOL)	1.7"
Width/Diameter (MOD)	2.2"
Net Weight (Lbs)	--

PACKAGING

Master Case	56
Dimensions	--
Country of Origin	China
HS Tariff	--

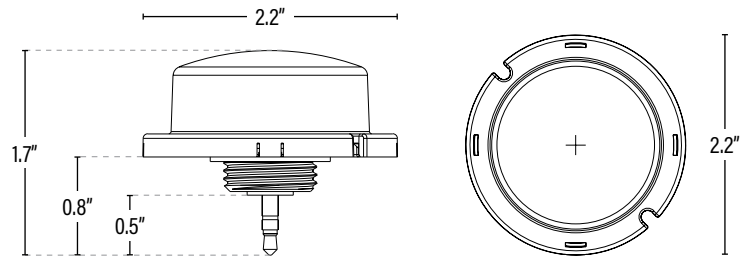

ORDERING

ITEM#	DESCRIPTION	CASE
LHB708	MOTION SENSOR (MW) FOR 2-PANEL LINEAR ISO	56

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55708

ADDITIONAL INFORMATION

- Trim Level: 100%
- Sensitivity: High
- Hold Time: 5 min.
- Stand-by Dim: 50%
- Stand-by Time: 30min.
- Photocell: Off

SENSOR SOCKET (Pre-installed in fixture)

