

LS2094 LT. COMMERCIAL • 5YR LED SURFACE MOUNT

LUMINARIES FOR COMMERCIAL AND
RESIDENTIAL BUILDINGS


FEATURES

- LED surface mount fixture provides glare free illumination and even light distribution with a clean, modern look.
- Diffusing lens
- Low profile design
- Easy installation for J-Box.

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, hallways, lobbies and other residential and commercial applications.

LIGHT DISTRIBUTION CURVE

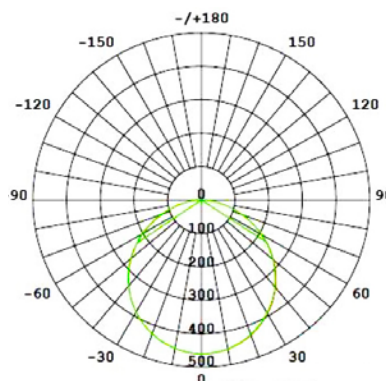

ELECTRICAL

Wattage	20W
Voltage	120V
Current	174mA
Power Factor	0.9
Total Harmonic Distortion (THD)	8.3

LIGHTING PERFORMANCE

Lumens	1200
Lumens Per Watt (Lm/W)	60
Color Temperature (CCT)	4000K
Color Rendering (CRI)	92
R9 (Red Value)	61
R13 (Skin Tones)	N/A
Beam Angle	112°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> see compatibility report

ENVIRONMENT

Operating Temperature	-22° ~ 104°F
Suitable Location	WET Indoor / Covered Ceilings
Ingress Protection Rating	IP54

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Smalite 2835
------------------	--------------

CONSTRUCTION

Housing	PC
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Manufacturer Model #	83891
----------------------	-------



Manufactured by P.Q.L., Inc. • Visit www.energystar.gov to confirm qualification. • Published lumens on LED products are approximate and may vary slightly.


LS2094 LT. COMMERCIAL • 5YR
LED SURFACE MOUNT



DIMENSIONS (Inches)

Length (MOL)	9"
Width/Diameter (MOD)	9"
Height	1"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

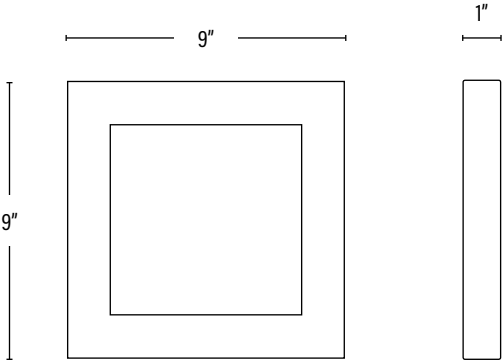

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768029731	--	--
Individual Box	1	811768029734	9.3" x 2.4" x 9.4"	--
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
LS2094	LED 20W DESIGNER SURFACE MOUNTED/9" SQUARE/WHITE/40K/DIMMABLE ENERGY STAR®	10

Manufactured by P.Q.L., Inc. - Manufacturer Model # 83891 - Visit www.energystar.gov to confirm qualification.

ADDITIONAL INFORMATION:

Not compatible for installation in recessed cans.

PERFORMANCE DATA

PACKAGING