



SELECTABLE WATTAGE & CCT

LVX434 LT. COMMERCIAL • 5YR
LED 4' SPEC-SELECT™ VAPOR TIGHT
DIRECT LINEAR AMBIENT LUMINARIES

FEATURES

Our Spec-Select™ Vapor Tights feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Use 30% less energy than a linear fluorescent fixtures.
- 100% UV stabilized polycarbonate housing and diffusers eliminates glare and produces even light distribution.
- Liquid silicone perimeter gasket
- Stainless steel clips.

APPLICATION

Ideal for parking garages, cold storage, food processing facilities, dusty and wet environments.

ELECTRICAL

Wattage	25W / 30W / 34W
Voltage	120-277V
Current	0.28-0.12A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

LIGHTING PERFORMANCE

Lumens	3325-4522
Lumens Per Watt (Lm/W)	133
Color Temperature (CCT)	3500K / 4100K / 5000K
Color Rendering (CRI)	82
R9 (Red Value)	1
R13 (Skin Tones)	81
Beam Angle	120°
Light Distribution	Very Short, Type II
BUG Rating (Backlight, Uplight, and Glare)	B2 - U3 - G2
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 113°F
Suitable Location	WET
Ingress Protection Rating	IP66

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Seoul 3528
Driver	SIP50-I750

CONSTRUCTION

Housing	Polycarbonate
Lens	Frosted
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Manufacturer Model #	55605
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


L VX434 LT. COMMERCIAL • 5YR LED 4' SPEC-SELECT™ VAPOR TIGHT



ITEM INFORMATION

DIMENSIONS (Inches)

Length	47.2"
Width	3.5"
Height	3.1"
Net Weight (Lbs)	4.4

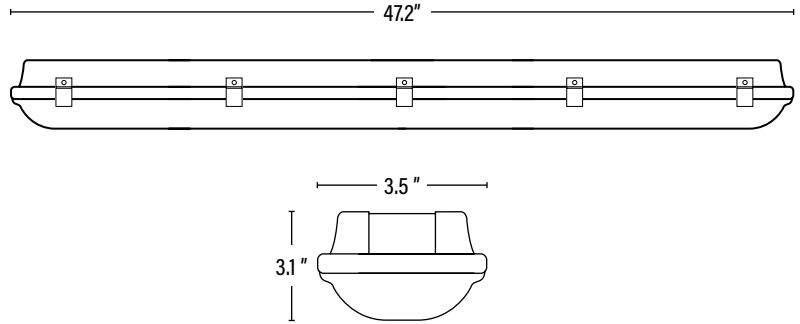

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10854432004993	49.5" x 8.5" 71"	24.1
Individual Box	1	854432004996	--	6
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
L VX434	LED 4' SPEC-SELECT™ VAPOR TIGHT - 25/30/34W/35-50K/FR LENS/120-277V/DIMMABLE	4

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55605

ACCESSORIES

LF3502	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN/SPLIT TYPE/L T20C (For use with drivers that are 100W or less.)	10
--------	---	----

ADDITIONAL INFORMATION:

- Default settings; 34W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. The color temperature and wattage should be selected prior to installation.

